

Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	

**SYSTEM
PLAST®**


**Smart
guide**



55525a

ARTICULATED FOOT Ø40 mm

www.SystemPlastSmartGuide.com

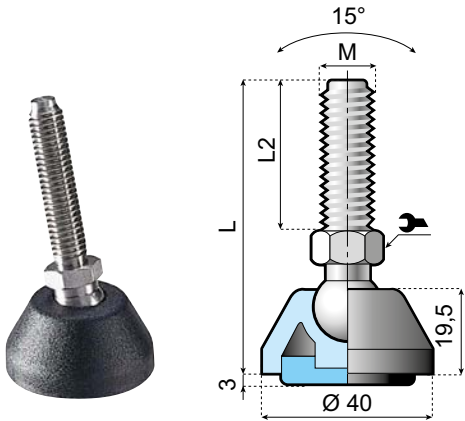


STANDARD CHOICE

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION		SPINDLE TYPE		
				STANDARD	ANTI-SLIP WITH RUBBER			
Zinc Plated Steel	M8	71	43	LA40H-PM8L70	LA40H-PM8L70R	2A	14	12.000
	M10	71	43	LA40H-PM10L70	LA40H-PM10L70R			
		99	71	LA40H-PM10L100	LA40H-PM10L100R			
	M12	153	125	LA40H-PM12L155	LA40H-PM12L155R			
	M14	153	125	LA40H-PM14L155	LA40H-PM14L155R	15A	13	12.000
Stainless Steel AISI 304	M16	149	119	LA40-PM16L150	LA40-PM16L150R			
	M8	71	43	LA40H-SM8L70	LA40H-SM8L70R	2A	14	12.000
	M10	71	43	LA40H-SM10L70	LA40H-SM10L70R			
		99	71	LA40H-SM10L100	LA40H-SM10L100R			
	M12	99	71	LA40H-SM12L100	LA40H-SM12L100R			
		153	125	LA40H-SM12L155	LA40H-SM12L155R	15A	13	12.000
	M16	149	119	LA40-SM16L150	LA40-SM16L150R			

Base: Reinforced polyamide.

SPINDLE TYPE

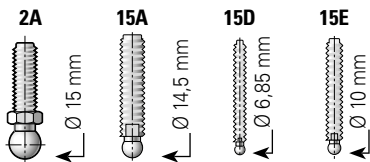

ANTI-SLIP PAD

Item description:

RPAD3206

Anti-slip pad: oil resistant rubber, 55 shore hardness.



Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	

**SYSTEM
PLAST®**


**Smart
guide**



5 5 5 4 0 a

ARTICULATED FOOT Ø50 mm

www.SystemPlastSmartGuide.com

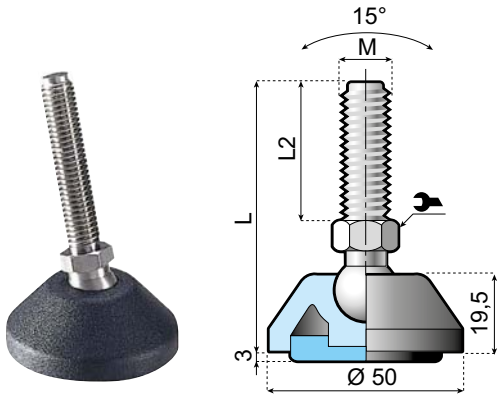


STANDARD CHOICE

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION		SPINDLE TYPE		
				STANDARD	ANTI-SLIP WITH RUBBER			
Zinc Plated Steel	M8	71	43	LA50H-PM8L70	LA50H-PM8L70R	2A	14	12.000
	M10	71	43	LA50H-PM10L70	LA50H-PM10L70R			
		99	71	LA50H-PM10L100	LA50H-PM10L100R			
	M12	153	125	LA50H-PM12L155	LA50H-PM12L155R			
	M14	153	125	LA50H-PM14L155	LA50H-PM14L155R	15A	13	12.000
	M16	99	69	LA50-PM16L100	LA50-PM16L100R			
		149	119	LA50-PM16L150	LA50-PM16L150R			
Stainless Steel AISI 304	M8	71	43	LA50H-SM8L70	LA50H-SM8L70R	2A	14	12.000
		99	71	LA50H-SM10L100	LA50H-SM10L100R			
	M10	71	43	LA50H-SM10L70	LA50H-SM10L70R			
		99	71	LA50H-SM10L100	LA50H-SM10L100R			
	M12	99	71	LA50H-SM12L100	LA50H-SM12L100R	15A	13	12.000
		153	125	LA50H-SM12L155	LA50H-SM12L155R			
	M16	99	69	LA50-SM16L100	LA50-SM16L100R			
		149	119	LA50-SM16L150	LA50-SM16L150R			
	M16	189	159	LA50-SM16L190	LA50-SM16L190R			

Base: Reinforced polyamide.

SPINDLE TYPE

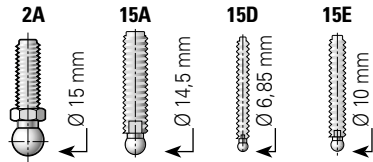

ANTI-SLIP PAD

Item description:

RPAD4206

Anti-slip pad: oil resistant rubber, 55 shore hardness.



Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	


SYSTEM PLAST®

Smart guide


55555a

ARTICULATED FOOT Ø60 mm

www.SystemPlastSmartGuide.com

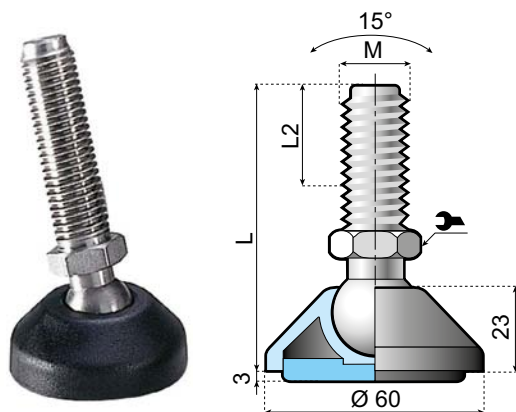

STANDARD CHOICE

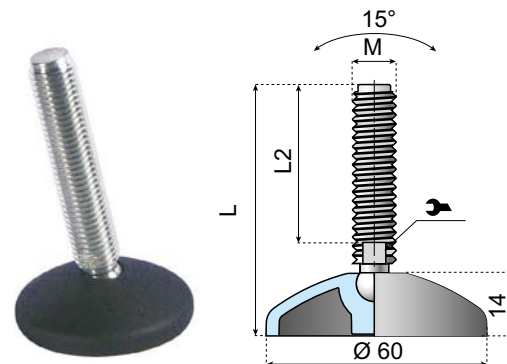

ECONOMICAL CHOICE

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION ASSEMBLED		SPINDLE TYPE			NUT MATERIAL
				STANDARD	ANTI-SLIP WITH RUBBER				
Zinc Plated Steel	M16	94	60	LA60H-PM16L95	LA60H-PM16L95R	2B	20	15.000	●
		149	115	LA60H-PM16L150	LA60H-PM16L150R				
		179	145	LA60H-PM16L180	LA60H-PM16L180R				
		229	195	LA60H-PM16L230	LA60H-PM16L230R				
	M20	179	145	LA60H-PM20L180	LA60H-PM20L180R	2C	24		●
	M24	236	195	LA60H-PM24L235	LA60H-PM24L235R				
Stainless Steel AISI 304	M16	94	60	LA60H-SM16L95-SN	LA60H-SM16L95R-SN	2B	19	15.000	●
		94	60	LA60H-SM16L95	LA60H-SM16L95R				
		149	115	LA60H-SM16L150	LA60H-SM16L150R				
		179	145	LA60H-SM16L180	LA60H-SM16L180R				
	M20	179	145	LA60H-SM20L180	LA60H-SM20L180R	2C	24		●
		236	195	LA60H-SM24L235	LA60H-SM24L235R				
	M16	104	62	LA60H-NM16L105-PN	LA60H-NM16L105R-PN	3C	24	4.000	FE.ZN
		104	62	LA60H-NM16L105-SN	LA60H-NM16L105R-SN				

Base: Reinforced polyamide.



PA.FE Polyamide with Steel Insert

● Without Nut

Base: Reinforced polyamide.

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION	SPINDLE TYPE		
Zinc Plated Steel	M12	115	90	LA60E-PM12L115	15E	9	9.000
		135	110	LA60E-PM12L135			
		155	130	LA60E-PM12L155			
	M16	95	70	LA60E-PM16L95	15A	13	12.000
		145	120	LA60E-PM16L145			
		185	160	LA60E-PM16L185			
Stainless Steel AISI 304	M12	95	70	LA60E-SM12L95	15E	9	9.000
		115	90	LA60E-SM12L115			
		135	110	LA60E-SM12L135			
		155	130	LA60E-SM12L155			
	M16	95	70	LA60E-SM16L95	15A	13	12.000
		145	120	LA60E-SM16L145			
		185	160	LA60E-SM16L185			
	M20	185	155	LA60E-SM20L185		16	12.000

SPINDLE TYPE

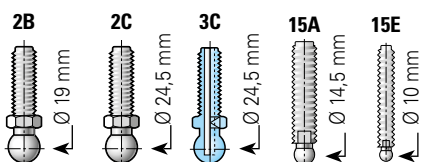

ANTI-SLIP PAD

Item description:

RPAD5306

Anti-slip pad: oil resistant rubber, 55 shore hardness.



Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	

SYSTEM PLAST®

Smart guide

55570a

ARTICULATED FOOT Ø80 mm

www.SystemPlastSmartGuide.com



SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION		SPINDLE TYPE			NUT MATERIAL
				STANDARD	ANTI-SLIP WITH RUBBER				
Zinc Plated Steel	M10	95	70	LA80-02B-PM10L95	-	15D	7	10.000	●
		150	125	LA80H-02B-PM10L150-PN	LA80H-02B-PM10L150R-PN	2A	14		FE.ZN
	M12	115	90	LA80-02B-PM12L115	-	15E	9	13.000	●
		135	110	LA80-02B-PM12L135	-				●
		150	125	LA80H-02B-PM12L150-PN	LA80H-02B-PM12L150R-PN	2A	14		FE.ZN
		155	130	LA80-02B-PM12L155	-	15E	9		●
	M14	105	80	LA80-02B-PM14L105	-			11	14.000
		155	130	LA80-02B-PM14L155	-	●			
	M16	95	70	LA80-02B-PM16L95	-	15A	13	15.000	●
		95	70	LA80-02B-PM16L95-PN	LA80-02B-PM16L95R-PN				FE.ZN
		145	120	LA80-02B-PM16L145	-				●
		145	120	LA80-02B-PM16L145-PN	LA80-02B-PM16L145R-PN				FE.ZN
		185	160	LA80-02B-PM16L185	-				●
		185	160	LA80-02B-PM16L185-PN	LA80-02B-PM16L185R-PN				FE.ZN
		205	180	LA80-02B-PM16L205	-				●
M20	185	160	LA80-02B-PM20L185	LA80-02B-PM20L185R		16	18.000	●	
Stainless Steel AISI 304	M10	95	70	LA80-02B-SM10L95	-	15D	7	10.000	●
	M12	95	70	LA80-02B-SM12L95	-	15E	9	13.000	●
		95	70	LA80H-02B-SM12L95-SN	LA80H-02B-SM12L95R-SN	2A	14		INOX
		115	90	LA80-02B-SM12L115	-	15E	9		●
		135	110	LA80-02B-SM12L135	-				●
		150	125	LA80H-02B-SM12L150-SN	LA80H-02B-SM12L150R-SN	2A	14		INOX
	M16	155	130	LA80-02B-SM12L155	-	15E	9	●	
		95	70	LA80-02B-SM16L95	-	15A	13	15.000	●
		95	70	LA80-02B-SM16L95-SN	LA80-02B-SM16L95R-SN				INOX
		145	120	LA80-02B-SM16L145	-				●
		145	120	LA80-02B-SM16L145-SN	LA80-02B-SM16L145R-SN				INOX
		185	160	LA80-02B-SM16L185	-				●
		185	160	LA80-02B-SM16L185-SN	LA80-02B-SM16L185R-SN				INOX
205	180	LA80-02B-SM16L205	-	●					

Base: Reinforced polyamide.


● Without Nut

Characteristics:


The foot can be fixed to the floor by opening the signs marked on the base.

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION		SPINDLE TYPE		
				STANDARD	ANTI-SLIP WITH RUBBER			
Zinc Plated Steel	M10	100	70	LA80H-PM10L100	LA80H-PM10L100R	2A	14	15.000
	M12	150	125	LA80H-PM12L150	LA80H-PM12L150R			
	M14	150	125	LA80H-PM14L150	LA80H-PM14L150R			
	M16	95	70	LA80-PM16L95	LA80-PM16L95R	15A	13	
		145	120	LA80-PM16L145	LA80-PM16L145R			
Stainless Steel AISI 304	M10	100	70	LA80H-SM10L100	LA80H-SM10L100R	2A	14	15.000
	M12	95	70	LA80H-SM12L95	LA80H-SM12L95R			
		150	125	LA80H-SM12L150	LA80H-SM12L150R			
	M16	95	70	LA80-SM16L95	LA80-SM16L95R	15A	13	
		145	120	LA80-SM16L145	LA80-SM16L145R			

Base: Reinforced polyamide.

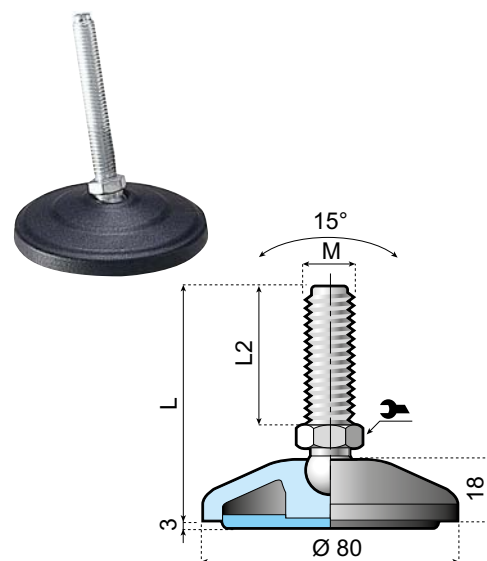

SPINDLE TYPE



Information about this product is only available on our Smart Guide® website.



Also available with solid base.

Go to:

555780a

ANTI-SLIP PAD

Item description:

RPAD7207

Anti-slip pad: oil resistant rubber, 55 shore hardness.



Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	

Characteristics:

The foot can be fixed to the floor by opening the signs marked on the base.

STANDARD CHOICE

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION		SPINDLE TYPE		
				STANDARD	ANTI-SLIP WITH RUBBER			
Zinc Plated Steel	M16	99	60	LA100H-02B-PM16L100	LA100H-02B-PM16L100R	2B	20	18.000
		154	115	LA100H-02B-PM16L155	LA100H-02B-PM16L155R			
		184	145	LA100H-02B-PM16L185	LA100H-02B-PM16L185R			
		234	195	LA100H-02B-PM16L235	LA100H-02B-PM16L235R			
	M20	124	85	LA100H-02B-PM20L125	LA100H-02B-PM20L125R			
		154	115	LA100H-02B-PM20L155	LA100H-02B-PM20L155R			
		184	145	LA100H-02B-PM20L185	LA100H-02B-PM20L185R			
		234	195	LA100H-02B-PM20L235	LA100H-02B-PM20L235R			
	M24	190	145	LA100H-02B-PM24L190	LA100H-02B-PM24L190R	2C	24	
Stainless Steel AISI 304	M16	99	60	LA100H-02B-SM16L100	LA100H-02B-SM16L100R	2B	19	18.000
		154	115	LA100H-02B-SM16L155	LA100H-02B-SM16L155R			
		184	145	LA100H-02B-SM16L185	LA100H-02B-SM16L185R			
		234	195	LA100H-02B-SM16L235	LA100H-02B-SM16L235R			
	M20	124	85	LA100H-02B-SM20L125	LA100H-02B-SM20L125R			
		154	115	LA100H-02B-SM20L155	LA100H-02B-SM20L155R			
		184	145	LA100H-02B-SM20L185	LA100H-02B-SM20L185R			
		234	195	LA100H-02B-SM20L235	LA100H-02B-SM20L235R			
	M24	160	115	LA100H-02B-SM24L160	LA100H-02B-SM24L160R	2C	24	
PA.FE	M16	109	62	LA100H-02B-NM16L110	LA100H-02B-NM16L110R	3C	24	4.000

Base: Reinforced polyamide.

PA.FE Polyamide with Steel Insert



Characteristics:

The foot can be fixed to the floor by opening the signs marked on the base.

ECONOMICAL CHOICE

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION	SPINDLE TYPE		
Zinc Plated Steel	M16	100	70	LA100E-02B-PM16L100	15A	13	12.000
		150	120	LA100E-02B-PM16L150			
		190	160	LA100E-02B-PM16L190			
		210	180	LA100E-02B-PM16L210			
	M20	145	115	LA100E-02B-PM20L145			
		190	160	LA100E-02B-PM20L190			
Stainless Steel AISI 304	M16	100	70	LA100E-02B-SM16L100	15A	13	12.000
		150	120	LA100E-02B-SM16L150			
		190	160	LA100E-02B-SM16L190			
		210	180	LA100E-02B-SM16L210			
	M20	145	115	LA100E-02B-SM20L145			
		190	160	LA100E-02B-SM20L190			
		220	190	LA100E-02B-SM20L220			
		220	190	LA100E-02B-SM20L220		16	12.000


Base: Reinforced polyamide.

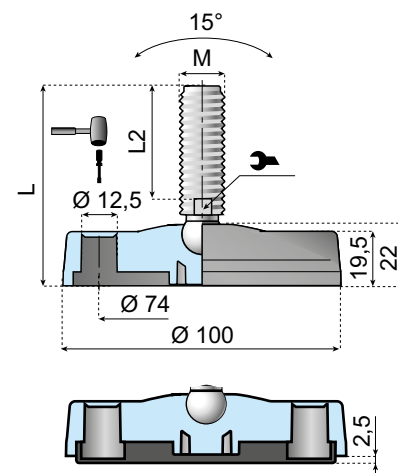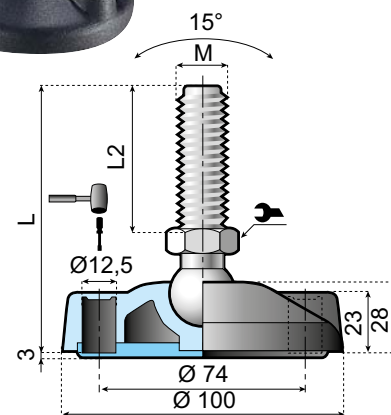

ANTI-SLIP PAD

Item description:
RPAD9308
 Anti-slip pad: oil resistant rubber, 55 shore hardness.

SPINDLE TYPE

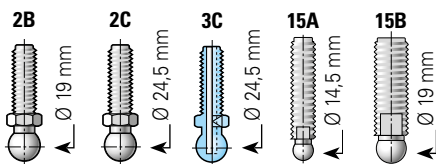

Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	

**SYSTEM
PLAST®**


**Smart
guide**



55600a

ARTICULATED FOOT Ø110 mm WITH HOLES

www.SystemPlastSmartGuide.com

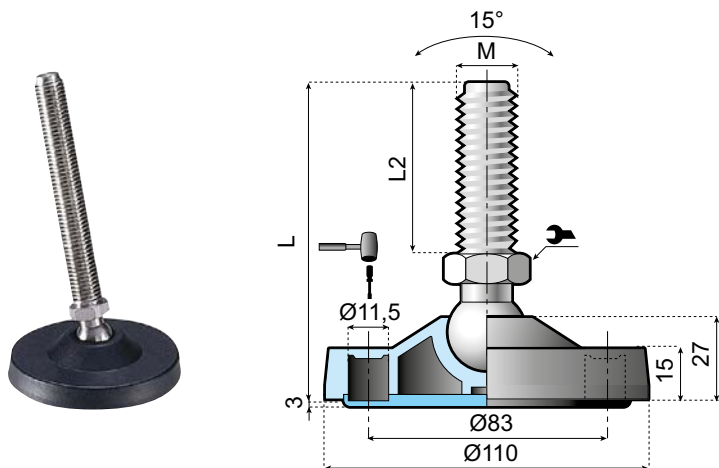


Characteristics:

The foot can be fixed to the floor by opening the signs marked on the base.

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION		SPINDLE TYPE			NUT MATERIAL
				STANDARD	ANTI-SLIP WITH RUBBER				
Zinc Plated Steel	M16	153	115	LA110H-02B-PM16L155	LA110H-02B-PM16L155R	2B	20	15.000	FE.ZN
		183	145	LA110H-02B-PM16L185	LA110H-02B-PM16L185R				
		233	195	LA110H-02B-PM16L235	LA110H-02B-PM16L235R				
	M20	153	115	LA110H-02B-PM20L155	LA110H-02B-PM20L155R				
		183	145	LA110H-02B-PM20L185	LA110H-02B-PM20L185R				
		233	195	LA110H-02B-PM20L235	LA110H-02B-PM20L235R				
	M24	190	145	LA110H-02B-PM24L190	LA110H-02B-PM24L190R	2C	24	18.000	●
		240	195	LA110H-02B-PM24L240	LA110H-02B-PM24L240R				
Stainless Steel AISI 304	M16	153	115	LA110H-02B-SM16L155	LA110H-02B-SM16L155R	2B	19	15.000	INOX
		183	145	LA110H-02B-SM16L185	LA110H-02B-SM16L185R				
		233	195	LA110H-02B-SM16L235	LA110H-02B-SM16L235R				
	M20	153	115	LA110H-02B-SM20L155	LA110H-02B-SM20L155R				
		183	145	LA110H-02B-SM20L185	LA110H-02B-SM20L185R				
	M24	190	145	LA110H-02B-SM24L190	LA110H-02B-SM24L190R	2C	24	18.000	●
		240	195	LA110H-02B-SM24L240	LA110H-02B-SM24L240R				

Base: Reinforced polyamide.

● Without Nut



ANTI-SLIP PAD

Item description:

RPAD10108

Anti-slip pad: oil resistant rubber, 55 shore hardness.




Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	



55615a

ARTICULATED FOOT Ø80 / 100 / 120 mm WITH HOLES

www.SystemPlastSmartGuide.com

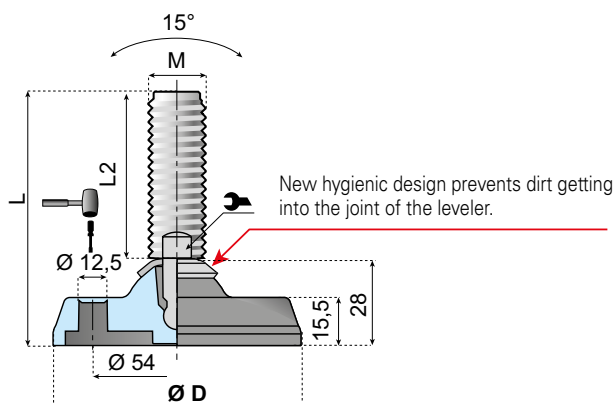

Characteristics:

The foot can be fixed to the floor by opening the signs marked on the base.

Ø D.80

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION	SPINDLE TYPE		
Stainless Steel AISI 304	M12	98	70	LAS80-02B-SM12L100	18	9	13.000
		128	100	LAS80-02B-SM12L130			
	M16	98	70	LAS80-02B-SM16L100		13	
		168	140	LAS80-02B-SM16L170			
	M20	168	140	LAS80-02B-SM20L170		16	

Ø D.100

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION	SPINDLE TYPE		
Stainless Steel AISI 304	M16	103	70	LAS100-02B-SM16L105	18	13	15.000
		173	140	LAS100-02B-SM16L175			
	M20	173	140	LAS100-02B-SM20L175		16	


Ø D.120

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION	SPINDLE TYPE		
Stainless Steel AISI 304	M16	103	70	LAS120-02B-SM16L105	18	13	18.000
		173	140	LAS120-02B-SM16L175			
	M20	173	140	LAS120-02B-SM20L175		16	

Base: Reinforced polyamide.

SPINDLE TYPE

18



ANTI-SLIP PAD



Item description:

RPAD7207	for foot Ø D.80
RPAD9308	for foot Ø D.100
RPAD11207	for foot Ø D.120

Anti-slip pad: oil resistant rubber, 55 shore hardness.


Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	

5 5 6 3 0 a

ARTICULATED FOOT - SINGLE LAG HOLE PAD

www.SystemPlastSmartGuide.com


SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION		SPINDLE TYPE			NUT MATERIAL
				STANDARD	ANTI-SLIP WITH RUBBER				
Zinc Plated Steel	M10	103	71	LA60H-01-PM10L105	-	2A	14	15.000	FE.ZN
		157	125	LA60H-01-PM10L155	-				
	M12	157	125	LA60H-01-PM12L155	LA60H-01-PM12L155R				
	M14	157	125	LA60H-01-PM14L155	-				
	M16	103	69	LA60-01-PM16L105	LA60-01-PM16L105R	15A	13		
		153	119	LA60-01-PM16L155	-				
		193	159	LA60-01-PM16L195	-				
SS AISI 304	M16	103	69	LA60-01-SM16L105	LA60-01-SM16L105R	15A	13	15.000	INOX
		153	119	LA60-01-SM16L155	LA60-01-SM16L155R				
		193	159	LA60-01-SM16L195	-				

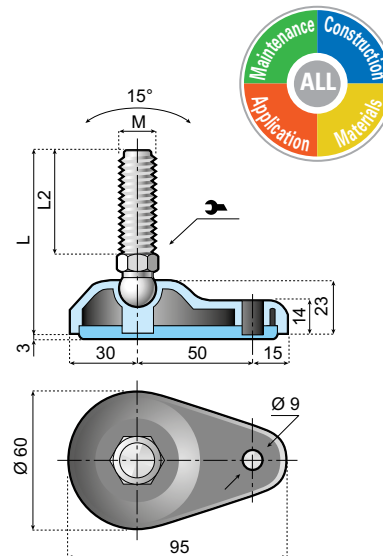


Solid base series:

The solid base will help equipment builders meet the requirements of the USDA and other government agencies, related to the prevention of contamination of food products and the growth of bacteria.

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION	SPINDLE TYPE		
Zinc Plated Steel	M16	103	69	LA60S-01-PM16L105	15A	13	22.000
		153	119	LA60S-01-PM16L155			
		193	159	LA60S-01-PM16L195			
SS AISI 304	M16	103	69	LA60S-01-SM16L105	15A	13	22.000
		193	159	LA60S-01-SM16L195			

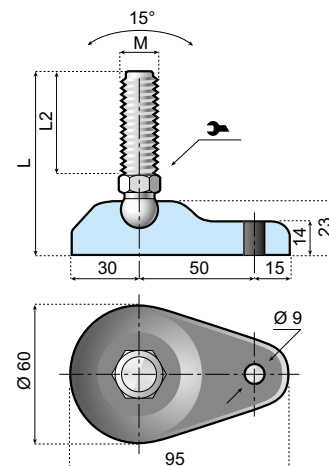

SPINDLE TYPE



ANTI-SLIP PAD

Item description:

RPAD5207

Anti-slip pad: oil resistant rubber, 55 shore hardness.



FIXED FOOT - SINGLE LAG HOLE PAD



Solid base series

The solid base will help equipment builders meet the requirements of the USDA and other government agencies, related to the prevention of contamination of food products and the growth of bacteria.

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION	SPINDLE TYPE		
Zinc Plated Steel	M20	188	147	LAF100SH-01-PM20L190	13	22	55.000
		188	147	-			
	M24	238	197	LAF100SH-01-PM24L240			
SS	M20	188	147	LAF100SH-01-SM20L190	13	22	55.000

SS Stainless Steel AISI 304

SPINDLE TYPE

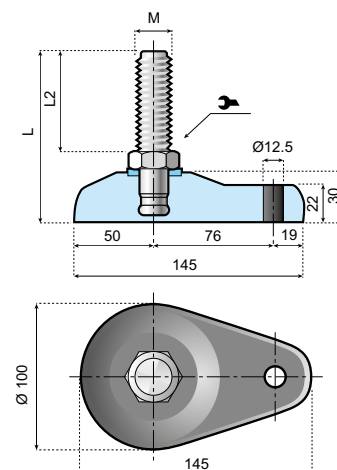

Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers	Engineering manual
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearing supports	
Curves & tracks	Side guide solutions	Miscellaneous products	Equipment	

Characteristics:

The foot can be fixed to the floor by opening the signs marked on the base.


Ø D.123 STANDARD CHOICE

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION ASSEMBLED		SPINDLE TYPE		
				STANDARD	ANTI-SLIP WITH RUBBER			
Zinc Plated Steel	M16	171	115	LA123H-02B-PM16L170	LA123H-02B-PM16L170R	2B	20	25.000
		251	195	LA123H-02B-PM16L250	LA123H-02B-PM16L250R			
	M20	141	85	LA123H-02B-PM20L140	LA123H-02B-PM20L140R			
		171	115	LA123H-02B-PM20L170	LA123H-02B-PM20L170R			
		201	145	LA123H-02B-PM20L200	LA123H-02B-PM20L200R			
	M24	251	195	LA123H-02B-PM20L250	LA123H-02B-PM20L250R			
		176	115	LA123H-02B-PM24L175	LA123H-02B-PM24L175R	2C	24	
		206	145	LA123H-02B-PM24L205	LA123H-02B-PM24L205R			
Stainless Steel AISI 304	M16	256	195	LA123H-02B-PM24L255	LA123H-02B-PM24L255R			
		171	115	LA123H-02B-SM16L170	LA123H-02B-SM16L170R	2B	19	25.000
		201	145	LA123H-02B-SM16L200	LA123H-02B-SM16L200R			
	251	195	LA123H-02B-SM16L250	LA123H-02B-SM16L250R				
	M20	141	85	LA123H-02B-SM20L140	LA123H-02B-SM20L140R			
		171	115	LA123H-02B-SM20L170	LA123H-02B-SM20L170R			
		201	145	LA123H-02B-SM20L200	LA123H-02B-SM20L200R			
	M24	251	195	LA123H-02B-SM20L250	LA123H-02B-SM20L250R	2C	24	
		146	85	LA123H-02B-SM24L145	LA123H-02B-SM24L145R			
		176	115	LA123H-02B-SM24L175	LA123H-02B-SM24L175R			
		206	145	LA123H-02B-SM24L205	LA123H-02B-SM24L205R			
256		195	LA123H-02B-SM24L255	LA123H-02B-SM24L255R				

Base: Reinforced polyamide.

PA.FE Polyamide with Steel Insert

SPINDLE TYPE



ANTI-SLIP PAD

Item description:

RPAD12208

Anti-slip pad: oil resistant rubber, 55 shore hardness.



Characteristics:


The foot can be fixed to the floor by opening the signs marked on the base.

Ø D.120 ECONOMICAL CHOICE

SPINDLE MATERIAL	M	L mm	L2 mm	ITEM DESCRIPTION ASSEMBLED	SPINDLE TYPE		
Zinc Plated Steel	M16	100	70	LA120E-02B-PM16L100	15A	13	18.000
		150	120	LA120E-02B-PM16L150			
		145	115	LA120E-02B-PM20L145		16	20.000
	M20	190	160	LA120E-02B-PM20L190			
		220	190	LA120E-02B-PM20L220			
Stainless Steel AISI 304	M16	100	70	LA120E-02B-SM16L100	15A	13	18.000
		150	120	LA120E-02B-SM16L150			
		190	160	LA120E-02B-SM16L190			
		210	180	LA120E-02B-SM16L210			
	M20	145	115	LA120E-02B-SM20L145		16	20.000
		190	160	LA120E-02B-SM20L190			
		220	190	LA120E-02B-SM20L220			

Base: Reinforced polyamide.

SPINDLE TYPE



ANTI-SLIP PAD

Item description:

RPAD11207

Anti-slip pad: oil resistant rubber, 55 shore hardness.

