

|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | Side guide solutions        | Miscellaneous products            | Equipment        |                    |

**SYSTEM  
PLAST®**

**Smart  
guide**

**5 1 6 0 0 a**

## CLAMPS FOR CONICAL SIDE GUIDES

www.SystemPlastSmartGuide.com

SINGLE CLAMP WITH PIN



For profiles, go to:

**5 1 5 2 0 a**



For brackets, go to:

**5 3 5 1 0 a**



continue ►






**WITHOUT ROD**



**WITH ROD**



**WITH SCREW**

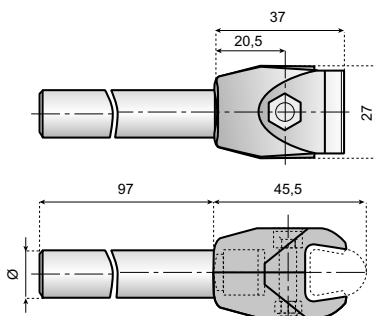

**MOQ**

Min. order quantity: 300 pcs.

| Ø A              | Ø B  | CLAMP TYPE | WITHOUT ROD | Ø 12           | Ø 14           | Ø 16           |    |
|------------------|------|------------|-------------|----------------|----------------|----------------|----|
| ITEM DESCRIPTION |      |            |             |                |                |                |    |
| 10               | 12   | 1          | CL-CON-P12M | CL-CON-P12100M | -              | -              | 50 |
| 12               | 13,5 | 2          | CL-CON-P14M | -              | CL-CON-P14100M | CL-CON-P16100M |    |

**Material:** clamp in reinforced polyamide (PA-FG Black), bolt in stainless steel, nut in nickel plated brass.  
**Supply:** assembled.





| WITH SCREW       |    |
|------------------|----|
| ITEM DESCRIPTION |    |
| CL-CON-P-M8      | 50 |

**MATERIAL:** clamp in reinforced polyamide (PA-FG Black), bolts in stainless steel, nut in nickel plated brass.  
**SUPPLY:** assembled.

## CLAMPS FOR CONICAL SIDE GUIDES


SINGLE CLAMP WITH SWIVEL PIN

**Material:** clamp in reinforced polyamide (PA-FG Black).  
Nut, screws, washer and rod in stainless steel.  
**Supply:** assembled.

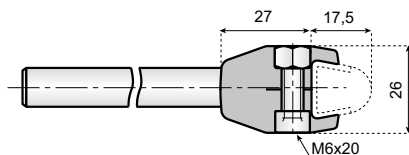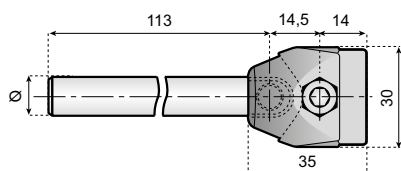


| WITHOUT ROD      | Ø 12            |    |
|------------------|-----------------|----|
| ITEM DESCRIPTION |                 |    |
| CL-CON-PS        | CL-CON-PS12100M | 50 |

### APPLICATION EXAMPLE



This design allows a max. swivel angle of 120°



For profiles, go to:

**5 1 5 2 0 a**



For brackets, go to:

**5 3 5 1 0 a**

continue ►

|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | Side guide solutions        | Miscellaneous products            | Equipment        |                    |




**5 1 6 1 0 a**

www.SystemPlastSmartGuide.com

## CLAMPS FOR CONICAL SIDE GUIDES

### DOUBLE PLASTIC CLAMPS WITH ROD STANDARD

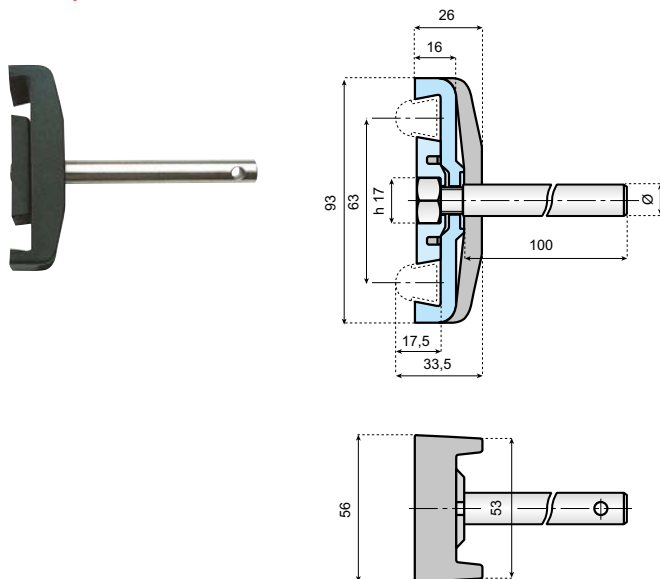

**Material:** reinforced polyamide, (PA-FG Black) nut, washer rod in stainless steel.

**Supply:** assembled.



For profiles, go to:

**5 1 5 2 0 a**

| WITHOUT ROD      | Ø 12            | Ø 14            | Ø 16            |    |
|------------------|-----------------|-----------------|-----------------|----|
| ITEM DESCRIPTION |                 |                 |                 |    |
| CL-CON-PD        | CL-CON-PD12100M | CL-CON-PD14100M | CL-CON-PD16100M | 50 |




For brackets, go to:

**5 3 5 1 0 a**

## CLAMPS FOR CONICAL SIDE GUIDES

### DOUBLE PLASTIC CLAMPS WITH ROD OTHER CENTER DISTANCES

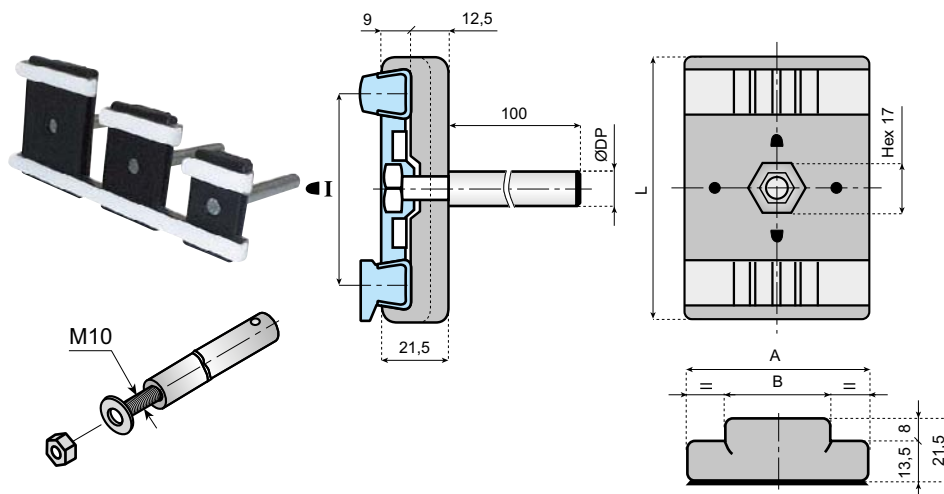

**MOQ** Min. order quantity: 300 pcs.

**Material:** reinforced polyamide (PA-FG Black), screw, washer and rod in stainless steel.

**Application:** the clamp is designed to be used with either the conical or Ø 12 mm round guide rails, simply by turning the internal flange plate.

**Use:** to support rods or conical guide rails with increased centers.

**Supply:** assembled.

| ►                | ●  | L   | A  | B  | WITHOUT ROD | Ø 12               | Ø 14               | Ø 16               |    |
|------------------|----|-----|----|----|-------------|--------------------|--------------------|--------------------|----|
| ITEM DESCRIPTION |    |     |    |    |             |                    |                    |                    |    |
| 47               | 51 | 70  | 43 | 30 | CL-CON-PD47 | CL-CON-PD47-12100M | CL-CON-PD47-14100M | CL-CON-PD47-16100M | 50 |
| 65               | 69 | 90  | 61 | 35 | CL-CON-PD65 | CL-CON-PD65-12100M | CL-CON-PD65-14100M | CL-CON-PD65-16100M |    |
| 85               | 89 | 110 | 80 | 40 | CL-CON-PD85 | CL-CON-PD85-12100M | CL-CON-PD85-14100M | CL-CON-PD85-16100M |    |




For profiles, go to:

**5 1 5 2 0 a**



For brackets, go to:

**5 3 5 1 0 a**

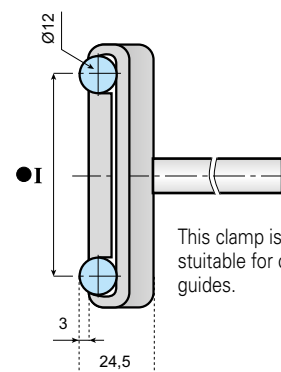

◀ back continue ▶

|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | <b>Side guide solutions</b> | Miscellaneous products            | Equipment        |                    |

# 51620a

## CLAMPS FOR CONICAL SIDE GUIDES

www.SystemPlastSmartGuide.com

**Use:** to support conical guide.



**Note:** Tightening bolt not included.

**Material:** Stainless Steel (AISI 304)






For profiles, go to:

**51520a**







| Ø | WITHOUT ROD      |    |
|---|------------------|----|
|   | ITEM DESCRIPTION |    |
| 9 | VG-012-01        | 50 |

◀ back continue ▶



Note: used with tall containers or when large and small containers run on the same production line. Tightening bolt not included.

| C mm | A mm  | WITHOUT ROD      |    |
|------|-------|------------------|----|
|      |       | ITEM DESCRIPTION |    |
| 63,5 | 86    | VG-011-01        | 50 |
| 84   | 106,5 | VG-011-04        |    |
| 95,2 | 117,7 | VG-011-03        |    |

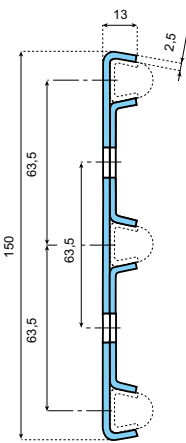


| WITHOUT ROD      |  |  |
|------------------|--|---------------------------------------------------------------------------------------|
| ITEM DESCRIPTION |  |                                                                                       |
| VG-011-02        |  | 50                                                                                    |






For brackets, go to:

**53510a**

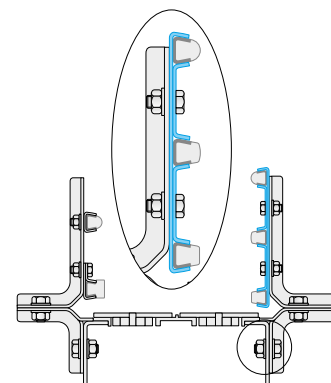

## RAIL CONNECTOR



### CONNECTING ELEMENT

**Use:** to connect two guide rails.

The part can be tapped on with a hammer.

**Material:** Stainless Steel (AISI 304).

| L mm | D THREADED SIZE = M8 |    |
|------|----------------------|----|
|      | ITEM DESCRIPTION     |    |
| 38   | VG-013-015           | 50 |
| 50   | VG-013-01            |    |



For brackets, go to:

**53510a**



For profiles, go to:

**51520a**

◀ back continue ▶

|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | <b>Side guide solutions</b> | Miscellaneous products            | Equipment        |                    |



**5 1 6 3 0 a**

## CLAMPS FOR CONICAL SIDE GUIDES


[www.SystemPlastSmartGuide.com](http://www.SystemPlastSmartGuide.com)

### HEAVY DUTY CLAMP

**Use:** two piece compression style for easy assembly and adjustment. Nut and washer not included.

**Note:** max recommended tightening torque 2.0 Kgm.

**Material:** Stainless Steel (AISI 304)

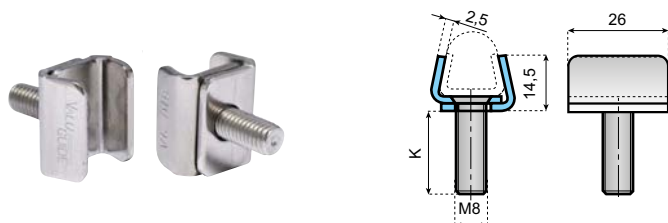

| K mm | ITEM DESCRIPTION  |     |
|------|-------------------|-----|
| 15,2 | <b>VG-018M-01</b> | 100 |
| 20   | <b>VG-018M-02</b> |     |
| 25,5 | <b>VG-018M-03</b> |     |
| 30   | <b>VG-018M-04</b> |     |

◀ back

### SINGLE CLAMP - STAINLESS STEEL

**Use:** easy assembly of guide profiles.

**Note:** max recommended tightening torque 1.8 Kgm.

**Material:** Stainless Steel (AISI 304).




| ITEM DESCRIPTION  |     |
|-------------------|-----|
| <b>VG-009M-01</b> | 100 |

### SINGLE CLAMP - THERMOPLASTIC

**Use:** it connects guide rail to bracket or rod using a standard M8 cap screw.

**Supply:** unassembled.

**Material:** clamp in reinforced polyamide (PA-FG Black)

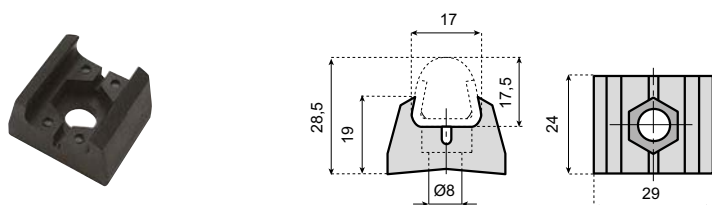


| WITHOUT ROD      |    |
|------------------|----|
| ITEM DESCRIPTION |    |
| <b>VG-016-02</b> | 50 |

### SINGLE CLAMP FOR FLAT BAR

**Material:** clamp in reinforced polyamide (PA-FG Black), bolts in stainless steel, nuts in nickel plated brass.

**Supply:** assembled.

**Use:** mount on Ø 12 diameter rod or 25x6 - 25x8, 25x10 flat bar.

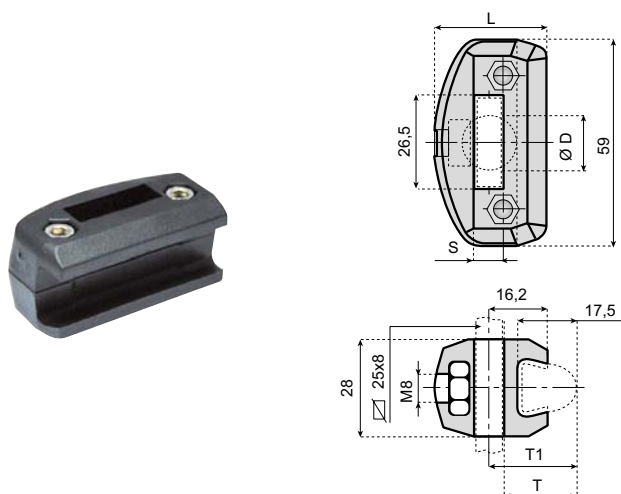

| FLAT BAR | ROUND BAR Ø D | L  | S    | T    | T1   | ITEM DESCRIPTION     |    |
|----------|---------------|----|------|------|------|----------------------|----|
| 25x6     | Ø 12          | 34 | 6,5  | 22,5 | 25,5 | <b>VG-022-01</b>     | 50 |
| 25x8     | -             | 33 | 9    | 21,5 | 25,5 | <b>CL-CON-P258M</b>  |    |
|          | -             | 40 | 9    | 28   | 32   | <b>CL-CON-P258WM</b> |    |
| 25x10    | -             | 34 | 10,5 | 21,5 | 26,5 | <b>CL-CON-P2510M</b> |    |



For profiles, go to:

**5 1 5 2 0 a**



For profiles, go to:

**5 1 7 3 0 a**



For profiles, go to:

**5 2 5 7 2 a**



For brackets, go to:

**5 3 5 1 0 a**

◀ back

|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | Side guide solutions        | Miscellaneous products            | Equipment        |                    |

**5 1 6 3 0 z**

[www.SystemPlastSmartGuide.com](http://www.SystemPlastSmartGuide.com)

## APPLICATION EXAMPLES



### SYSTEMS FOR SHRINK WRAPPED PRODUCTS.

LBP chains, go to:

**1 1 0 1 2 a**

Roller side guides, go to:

**5 2 5 1 0 a**



### SPEEDSET™ SIDE GUIDE ADJUSTMENT SYSTEM.

For details, go to:

**5 3 5 9 5 a**



### ACCUMULATION SYSTEM FOR SHRINK WRAPPED PRODUCTS.

LBP chains, go to:

**1 1 0 1 2 a**

Roller side guides, go to:

**5 2 5 1 0 a**

|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | Side guide solutions        | Miscellaneous products            | Equipment        |                    |

5 1 6 4 0 a

## CLAMPS FOR ROUND SIDE GUIDES

www.SystemPlastSmartGuide.com



For brackets, go to:



5 3 5 1 0 a





continue ►





WITHOUT ROD



WITH ROD

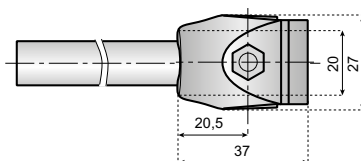

WITH M8 SCREWS



**Material:** clamp in reinforced polyamide, bolt in stainless steel, nut in nickel plated brass, rod in stainless steel AISI 303.

**Supply:** assembled.

**Material:** clamp in reinforced polyamide, bolt in stainless steel, nut in nickel plated brass.

**Supply:** assembled.



| FOR GUIDE Ø | WITHOUT ROD      | Ø 12            | Ø 14            | Ø 16            |    |
|-------------|------------------|-----------------|-----------------|-----------------|----|
|             | ITEM DESCRIPTION |                 |                 |                 |    |
| 8           | CL-RD8-P         | CL-RD8-P12100M  | CL-RD8-P14100M  | CL-RD8-P16100M  | 50 |
| 10          | CL-RD10-P        | CL-RD10-P12100M | CL-RD10-P14100M | CL-RD10-P16100M |    |
| 12          | CL-RD12-P        | CL-RD12-P12100M | CL-RD12-P14100M | CL-RD12-P16100M |    |
| 14          | CL-RD14-P        | CL-RD14-P12100M | CL-RD14-P14100M | CL-RD14-P16100M |    |

| FOR GUIDE Ø | WITH M8 SCREWS   |    |
|-------------|------------------|----|
|             | ITEM DESCRIPTION |    |
| 8           | CL-RD8-P-M8      | 50 |
| 10          | CL-RD10-P-M8     |    |
| 12          | CL-RD12-P-M8     |    |
| 14          | CL-RD14-P-M8     |    |



MOQ Min. order quantity: 300 pcs.



WITHOUT ROD



WITH ROD

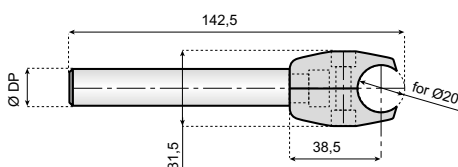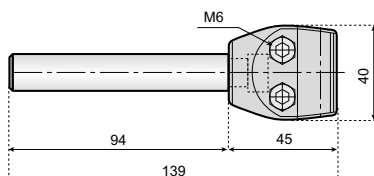

50

**Material:** clamp in reinforced polyamide, bolts, nuts and rod in stainless steel.

**Supply:** assembled.

| WITHOUT ROD      | Ø 12            | Ø 14            | Ø 16            |
|------------------|-----------------|-----------------|-----------------|
| ITEM DESCRIPTION |                 |                 |                 |
| CL-RD20-P        | CL-RD20-P12100M | CL-RD20-P14100M | CL-RD20-P16100M |

MOQ Min. order quantity: 300 pcs.

continue ►

|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | Side guide solutions        | Miscellaneous products            | Equipment        |                    |

**SYSTEM  
PLAST®**


**Smart  
guide**

**5 1 6 5 0 a**

www.SystemPlastSmartGuide.com

## CLAMPS FOR ROUND SIDE GUIDES

### DOUBLE PLASTIC CLAMPS WITH ROD STANDARD

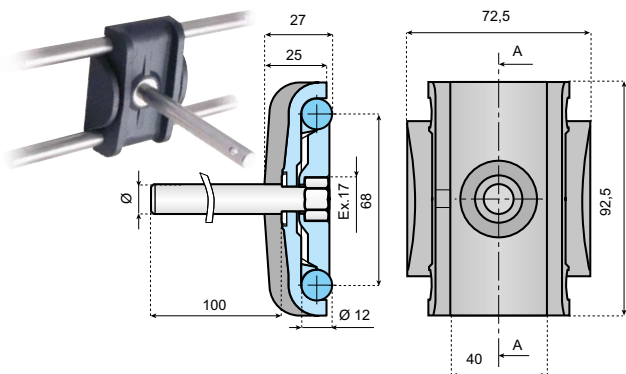

For brackets, go to:

**5 3 5 1 0 a**

**Material:** clamp in reinforced polyamide, nut and rod in stainless steel.

**Supply:** assembled.



back

| WITHOUT ROD      | Ø 12             | Ø 14             | Ø 16             |    |
|------------------|------------------|------------------|------------------|----|
| ITEM DESCRIPTION |                  |                  |                  |    |
| CL-RD12-PD       | CL-RD12-PD12100M | CL-RD12-PD14100M | CL-RD12-PD16100M | 50 |

## CLAMPS FOR ROUND SIDE GUIDES


### DOUBLE PLASTIC CLAMPS WITH ROD OTHER CENTER DISTANCE



Ø 8-10 mm; Ø 10-12 mm

**Material:** clamp in reinforced polyamide bolt, nut and rod in stainless steel AISI 304.

**Use:** round profile guides (8-10 and 10-12 mm) can be used simply turning the flange position.


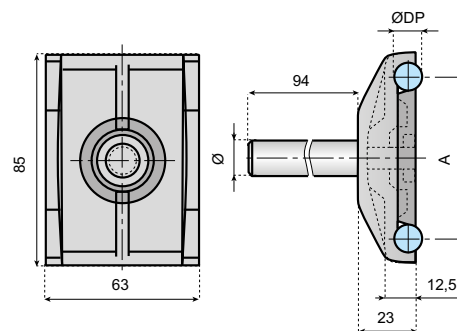


| TYPE             | DP | A  | WITHOUT ROD | Ø 12             | Ø 14             | Ø 16             |    |
|------------------|----|----|-------------|------------------|------------------|------------------|----|
| ITEM DESCRIPTION |    |    |             |                  |                  |                  |    |
| A                | 8  | 68 | CL-RD8-PD   | CL-RD8-PD12100M  | CL-RD8-PD14100M  | CL-RD8-PD16100M  | 50 |
|                  | 10 | 66 |             |                  |                  |                  |    |
| B                | 10 | 66 | CL-RD10-PD  | CL-RD10-PD12100M | CL-RD10-PD14100M | CL-RD10-PD16100M |    |
|                  | 12 | 64 |             |                  |                  |                  |    |

### APPLICATION EXAMPLE

| TYPE A                                                     |                                                             | TYPE B                                                      |                                                             |
|------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|
| Flange position for assembling guides with diam. d = 8 mm. | Flange position for assembling guides with diam. d = 10 mm. | Flange position for assembling guides with diam. d = 10 mm. | Flange position for assembling guides with diam. d = 12 mm. |
|                                                            |                                                             |                                                             |                                                             |

## PLASTIC SINGLE CLAMPS FOR FLAT BAR





**Material:** clamp in polyamide, bolt stainless steel.

**Use:** with round profile guide Ø8 mm.

**Supply:** assembled.

| WITHOUT ROD      |    |
|------------------|----|
| ITEM DESCRIPTION |    |
| CL-RD8-PF        | 50 |



For brackets, go to:

**5 3 5 1 0 a**

**Material:** clamp in reinforced polyamide, bolt in stainless steel, nut in nickel plated brass.

**Supply:** assembled.

| FOR GUIDE Ø | L  | K    | Y  | H    | H1   | WITHOUT ROD      |    |
|-------------|----|------|----|------|------|------------------|----|
|             |    |      |    |      |      | ITEM DESCRIPTION |    |
| 8           | 58 | 33   | 21 | 18   | 16   | CL-RD8-P258M     | 50 |
| 10          | 58 | 33   | 21 | 18.5 | 16   | CL-RD10-P258M    |    |
| 12          | 59 | 34.5 | 24 | 21   | 19   | CL-RD12-P258M    |    |
| 14          | 58 | 34   | 25 | 22   | 17.5 | CL-RD14-P258M    |    |

back

|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | Side guide solutions        | Miscellaneous products            | Equipment        |                    |

# SYSTEM PLAST®



## 51660a


## CLAMPS FOR D-SHAPE SIDE GUIDES

www.SystemPlastSmartGuide.com


|  | METAL PROFILE MATERIAL                                                            | UHMWPE GREEN     | UHMWPE BLACK |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------|--------------|-------------------------------------------------------------------------------------|
|                                                                                   |                                                                                   | Item description |              |                                                                                     |
|                                                                                   |  | VG-SD-G-10       | VG-SD-B-10   | 3m                                                                                  |
|                                                                                   |                                                                                   | VG-SD-G-20       | VG-SD-B-20   | 6m                                                                                  |
|                                                                                   |  | VG-GD-G-10       | VG-GD-B-10   | 3m                                                                                  |
| VG-GD-G-20                                                                        |                                                                                   | VG-GD-B-20       | 6m           |                                                                                     |




WITHOUT ROD



WITH ROD

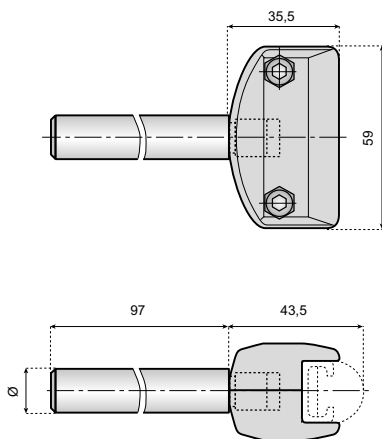

WITH M8 SCREW

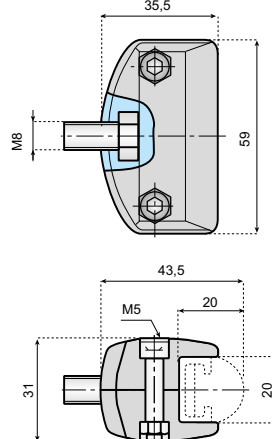

For loose profiles, go to:

51660b



For brackets, go to:

53510a



Information about this product is only available on our Smart Guide® website.

**Material:** clamp in reinforced polyamide, bolt in stainless steel, nut in nickel plated brass, rod in stainless steel AISI 303.

**Supply:** unassembled.

| WITHOUT<br>ROD   | Ø 12         | Ø 14         | Ø 16         |  |
|------------------|--------------|--------------|--------------|-------------------------------------------------------------------------------------|
| ITEM DESCRIPTION |              |              |              |                                                                                     |
| CL-D-P12M        | CL-D-P12100M | CL-D-P14100M | CL-D-P16100M | 100                                                                                 |


**Material:** clamp in reinforced polyamide, bolt in stainless steel, nut in nickel plated brass.

**Supply:** unassembled.

| WITH SCREW       |     |
|------------------|-----|
| ITEM DESCRIPTION |     |
| CL-D-P-M8        | 100 |


MOQ Min. order quantity: 300 pcs.

## SINGLE PLASTIC CLAMP FOR FLAT BAR




**Material:** clamp in reinforced polyamide, bolt in stainless steel, nut in nickel plated brass.

**Supply:** assembled.



| WITHOUT ROD      |     |
|------------------|-----|
| ITEM DESCRIPTION |     |
| CL-D-P258M       | 100 |

## DOUBLE PLASTIC CLAMP WITH ROD

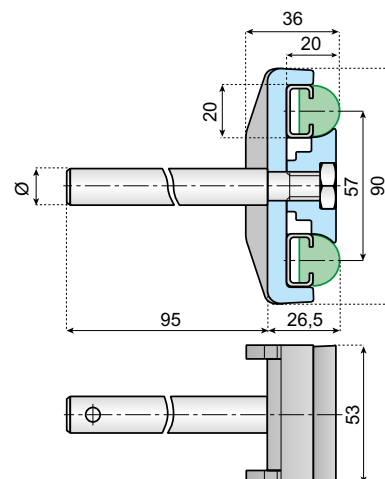

**Material:** clamp in reinforced polyamide, nut and rod in stainless steel.


**Supply:** unassembled.

| WITHOUT<br>ROD   | Ø 12          | Ø 14          |  |
|------------------|---------------|---------------|---------------------------------------------------------------------------------------|
| ITEM DESCRIPTION |               |               |                                                                                       |
| CL-D-PD          | CL-D-PD12100M | CL-D-PD14100M | 100                                                                                   |



|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | <b>Side guide solutions</b> | Miscellaneous products            | Equipment        |                    |

For index side  
guides, go to:

**5 1 5 1 0 a**



**MOQ** Min. order quantity: 180 m

|                                                                                    | STAINLESS STEEL  | ZINC PLATED STEEL |                                                                                                   |  |
|------------------------------------------------------------------------------------|------------------|-------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                                                                                    | ITEM DESCRIPTION |                   |                                                                                                   |                                                                                     |
|   | VG-S1020M-10     | VG-G1020M-10      |                                                                                                   | 3m                                                                                  |
|                                                                                    | VG-S1020M-20     | VG-G1020M-20      |                                                                                                   | 6m                                                                                  |
|                                                                                    | UHMWPE GREEN     | UHMWPE BLACK      | NOLU-S™<br>    |                                                                                     |
|                                                                                    | ITEM DESCRIPTION |                   |                                                                                                   |                                                                                     |
|  | VG-PD-G-10       | VG-PD-B-10        | VG-PD-NS-10  | 3m                                                                                  |
|                                                                                    | VG-PD-G-20       | VG-PD-B-20        | -                                                                                                 | 6m                                                                                  |



For clamps for D-shape  
side guides, go to:

**5 1 6 6 0 a**

|                           |                             |                                   |                  |                    |
|---------------------------|-----------------------------|-----------------------------------|------------------|--------------------|
| Chains & sprockets        | Wear strips                 | Side guide brackets & accessories | Levelers         | Engineering manual |
| Modular belts & sprockets | Chain & belt return systems | Frame & structure supports        | Bearing supports |                    |
| Curves & tracks           | Side guide solutions        | Miscellaneous products            | Equipment        |                    |

**SYSTEM  
PLAST®**

**Smart  
guide**

**5 1 6 8 0 a**

## PRODUCT GUIDES AND CLAMPS FOR FLAT SIDE GUIDES

[www.SystemPlastSmartGuide.com](http://www.SystemPlastSmartGuide.com)

### GUIDE RAILS (FLAT TYPE)



**Material:** Polyethylene PE 500 (green).

**Characteristics:**



- Profile can be bent or calendered by means of usual systems.
- Coefficient of linear expansion:  $2.5 \times 10^{-4}$ .
- Temperature range for continuous use in air:  $-35^{\circ}\text{C} / +70^{\circ}\text{C}$ .
- Min. bending radius: 200 mm.

**Notes:** when sealing the ends, a 2 mm space must be left between the silicone and the end of the bar to compensate for linear contraction of the guide rail at low temperatures.

**Characteristics:** To use this guide, a 30x5 mm steelbar should be inserted.

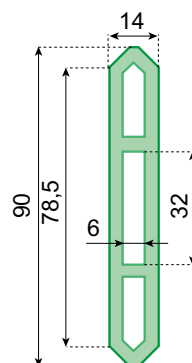


| ITEM DESCRIPTION              |      |     |
|-------------------------------|------|-----|
| <b>MATERIAL: PE-500 GREEN</b> |      |     |
| VG-H9014M-G-10                | 30 m | 3 m |
| VG-H9014M-G-20                |      | 6 m |



#### END-PLUG

| ITEM DESCRIPTION          |    |
|---------------------------|----|
| <b>MATERIAL: PA GREEN</b> |    |
| PEN-H9014M-G              | 10 |



#### CONNECTING PLUG

| ITEM DESCRIPTION          |    |
|---------------------------|----|
| <b>MATERIAL: PA GREEN</b> |    |
| PCO-H9014M-G              | 10 |



### CLAMP WITH SWIVEL ROD




**Surface:** tumbling finish.

**Supply:** unassembled.

**Material:** Stainless Steel (AISI 304)

| WITHOUT ROD             | Ø 12              | Ø 14              |    |
|-------------------------|-------------------|-------------------|----|
| <b>ITEM DESCRIPTION</b> |                   |                   |    |
| CL-H9014M-S             | CL-H9014M-S12100M | CL-H9014M-S14100M | 50 |

**MOQ** Min. order quantity: 300 pcs.

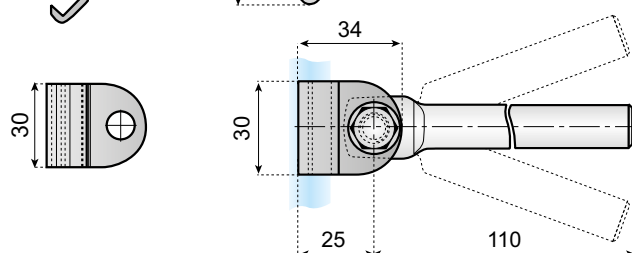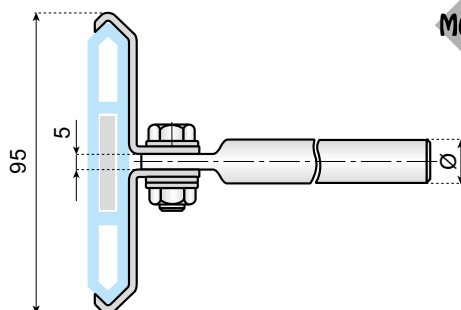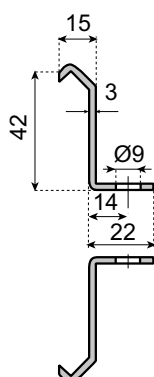

For brackets, go to:

**5 3 5 1 0 a**